




COMPLET PRO -350

The support system designed by
and for professionals

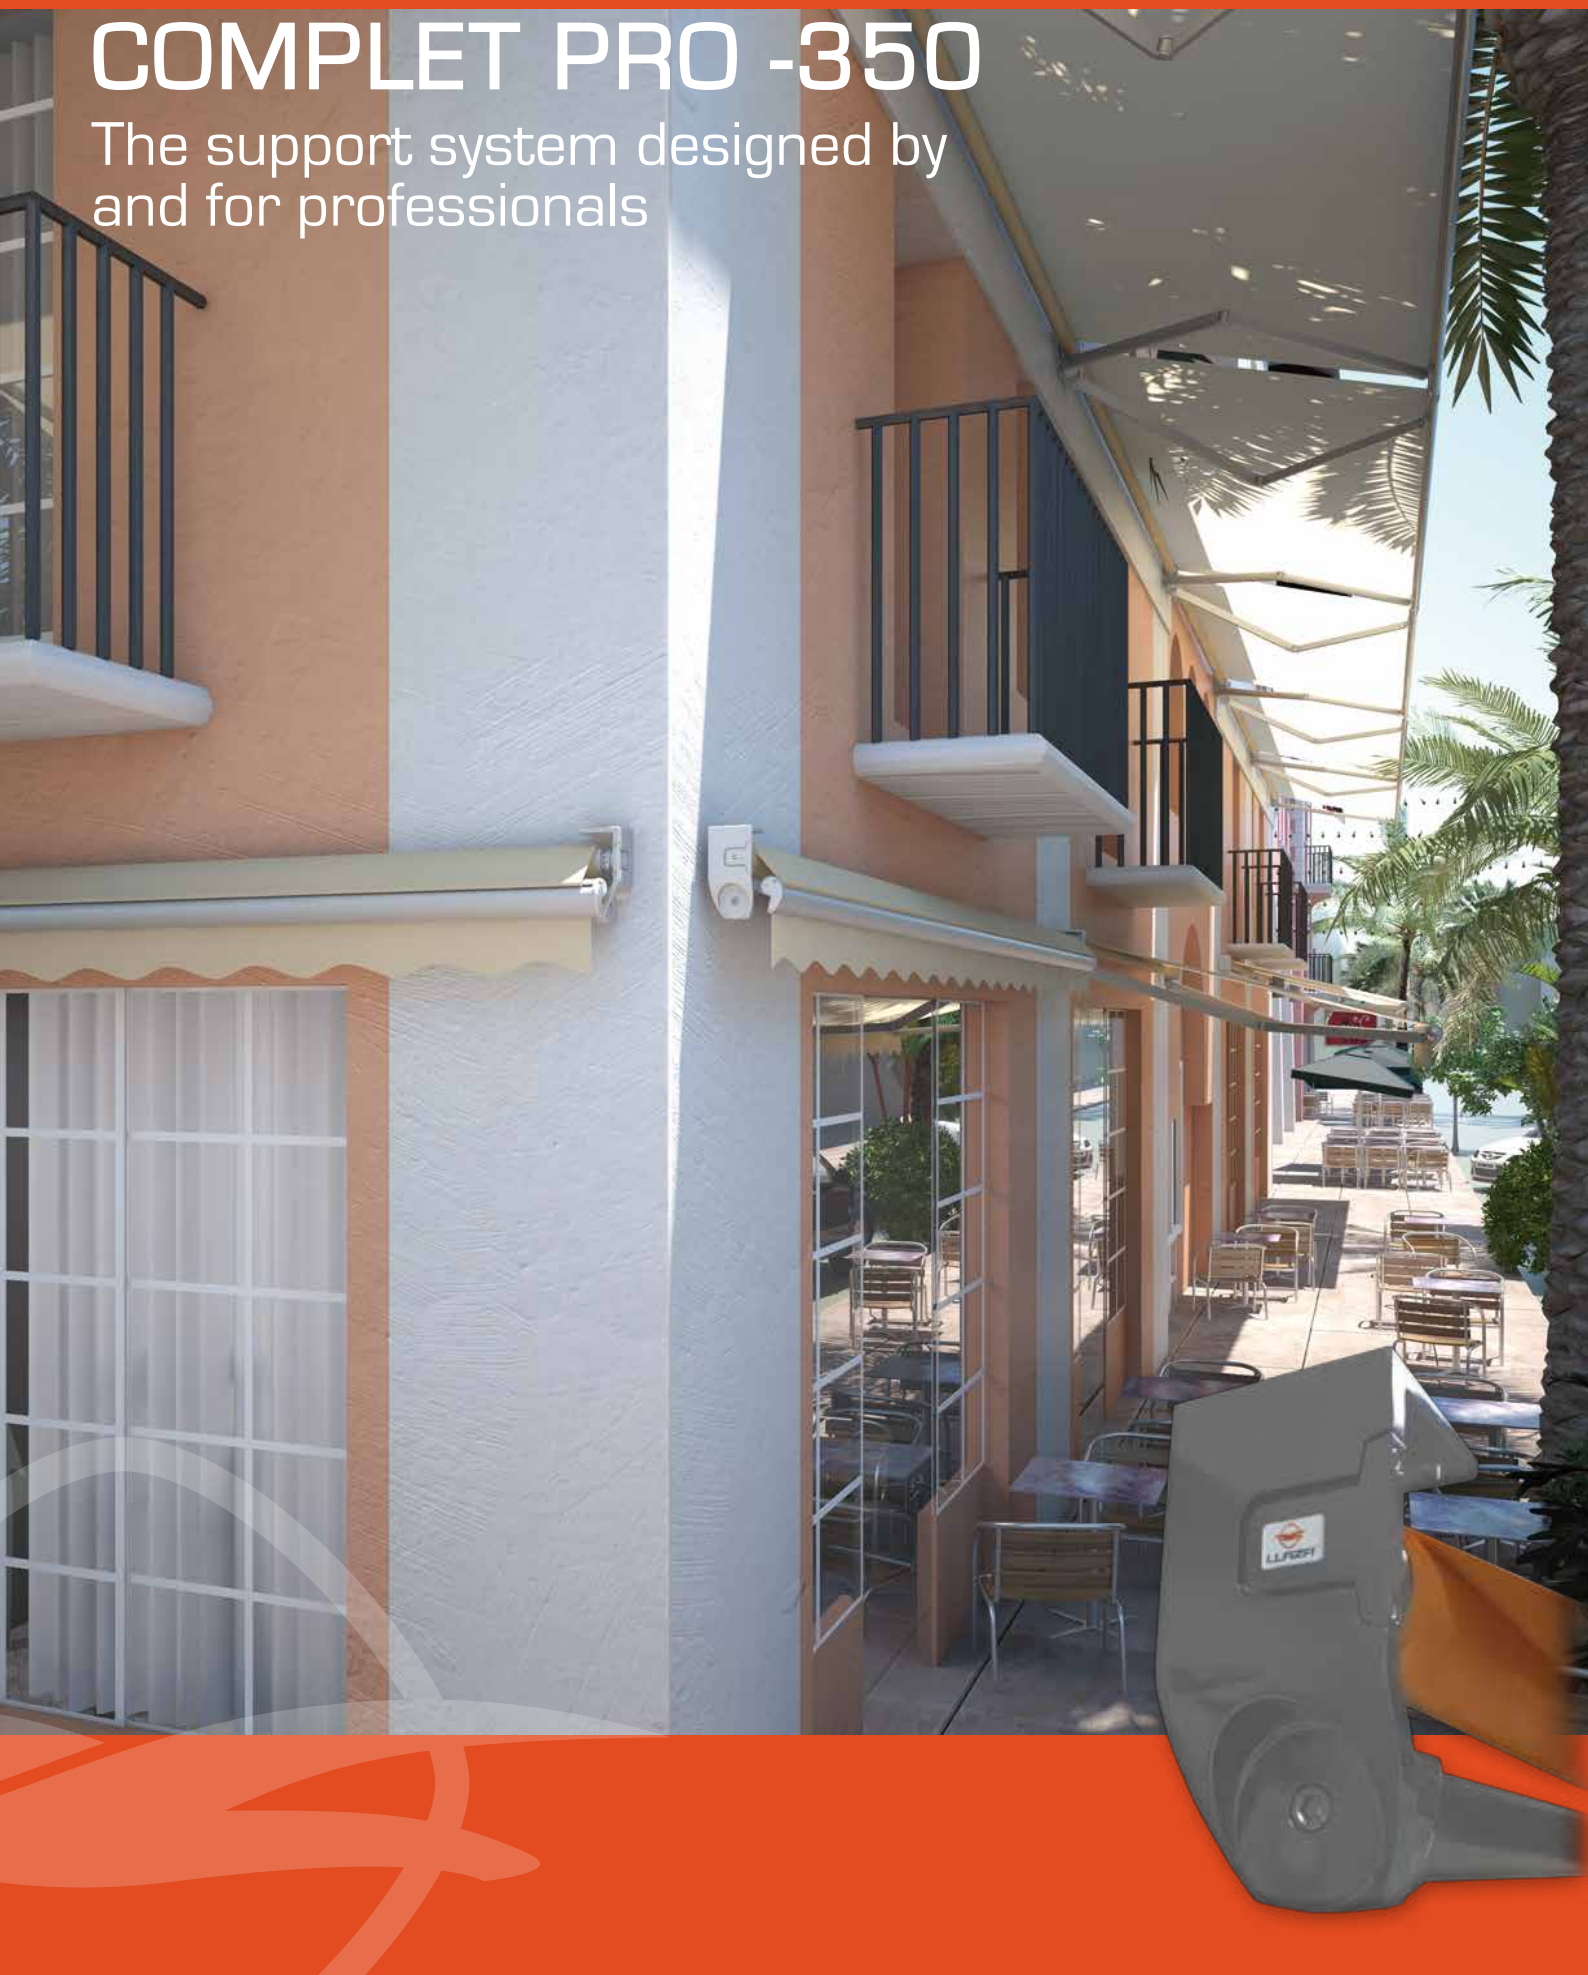

COMPLET PRO - 350

By and for professionals

Description

The Complet Pro-350 support system combines all of the qualities most valued by professionals. Designed by and for professionals, Complet Pro-350 incorporates the latest in practical and advanced features to make installation fast and safe.

Its dual-adjustment system means you can make sure the arm is parallel by easily accessing the internal tightening stud under the cap. The unit's inclination can be set from 0-85° thanks to its reliable and accurate double-pivot system.

Its 100% metal structure gives it uniform colour and an elegant look. This unique feature also makes it exceptionally sturdy, extending 6 meters width without the need for intermediate supports, with projection of up to 3.50 m.

The roller assembly is easy to install thanks to the lateral cassette system that supports it while the final attachments are made.

Its compactness and sleek look make it perfect for front, ceiling or between-wall installation on terraces or balconies.

Features:

- Safe and reliable arm alignment and unit inclination dual-adjustment system
- Retention system to prevent screws and bolts from falling out during installation
- Cassette system with self-supporting roller assembly to ensure comfortable, safe and uninterrupted installation
- Functional compact linear design that adapts to any style of facade
- Balanced look, 100% metal without plastic elements to interfere with uniformity of colour.

Tensioning system

The Complet Pro-350 support system is compatible with two arms



ART 350: Features internal ART tensioning system, comprised of a flat and flexible belt to improve transmission and increase lifespan.



ONYX – ONYX LUX: Belt transmission system for a perfect balance of strength, durability and flexibility. Designed to ensure that the fabric never rubs against the arm's elbow joints. The LUX features a slot with a diffuser for LED lighting.



SPLENDOR 400: Optimal tension thanks to its self-adjusting system with ball bearings in the elbow joint. Total concealment of the transmission system gives it a compact, elegant and sleek look.

Ideal for installation on:



Balconies




Terraces

COMPLET PRO - 350

Technical specifications

Maximum dimensions (m)


Projection (m)	Width (m)
3,50	6,00

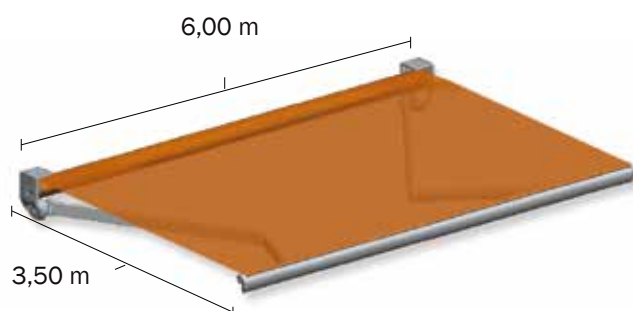

Slope

0° a 85°

Mounting



MINIMUM WIDTH WITH 2 ARMS

Width (m)	Interior gearbox	Exterior gearbox motor
1,50	1,95 m.	2,00 m.
1,75	2,20 m.	2,25 m.
2,00	2,45 m.	2,50 m.
2,25	2,70 m.	2,75 m.
2,50	2,95 m.	3,00 m.
2,75	3,20 m.	3,25 m.
3,00	3,45 m.	3,50 m.
3,25	3,70 m.	3,75 m.
3,50	3,95 m.	4,00 m.

Dimensions (mm)



Operation

- ☒ Manual
- ☒ Motorised
- ☒ Automated

Finishes

Lacquer in accordance with QUALICOAT standards
Stainless steel screws and bolts

Accessories



Galaxia weather cover



Sombrex-system



Crossed arm kit

MOTOR SELECTION TABLE

	Arm projection			
	1,50 - 2,25	2,50 - 2,75	3,00 - 3,25	3,50
R. TUBE Ø 70 mm	50 Nm	50 Nm		
R. TUBE Ø 80 mm		55 Nm		

Observe this model in Augmented Reality using the Fotostyle360® app



LLAZA WORLD, S.A. Tramuntana, 1 Pol. Ind. Roques Roges 43460 ALCOVER- Spain

T. +34 977 990 600

info@llaza.com

F. +34 977 990 610

export@llaza.com



www.llaza.com



Fotostyle360®

www.fotostyle360.com

Available on the iPhone
App Store

Google play

