



BENEFICIOS PARA EL USUARIO FINAL

- Estética y tecnología de gama alta.
- Concepción 100% metálica, sin tapones de plástico.
- Óptimas proporciones que permiten una gran versatilidad y adaptación a múltiples espacios.
- Su diseño combina formas suaves y ángulos con carácter para obtener una estética inspirada en la variedad de las formas de la naturaleza.
- Posibilidad de iluminación en los brazos.

Sombrex:

- El faldón enrollable ofrece más protección a primera y última hora del día, cuando los rayos solares son más horizontales.
- Posibilidad de iluminación en el perfil frontal.

VENTAJAS PARA EL INSTALADOR

- La regulación de la inclinación por cremallera y su sistema de anclaje permiten un montaje fácil y rápido.

BENEFITS FOR THE END USER

- It features a high-end look combined with cutting-edge technology.
- 100% metal on the exterior – no plastic caps.
- Optimal proportions make it easily adaptable to a wide variety of settings.
- Its design combines smooth shapes and angles to create a look inspired by the variety of forms in nature.
- Possibility of lighting in the retractable arms.


Sombrex:

- The adjustable rolling valance offers more protection in the morning and evening, when the sunlight is most direct.
- Possibility of lighting in the front profile.

BENEFITS FOR THE PROFESSIONAL INSTALLERS

- Its rack system allows for easy slope adjustment and plate mounting makes installation quick and easy.

Dimensiones máximas | Maximum dimensions (m)

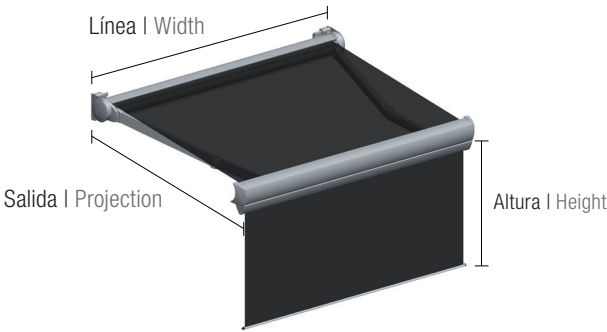

Nº Brazos Arms No.	Línea máx. Max. width	Salida máx. Max. projection	Altura máx. Max. height
2	6,00	3,00	1,80
	5,00	3,50	1,80

Accionamiento | Operation

Toldo Splenbox

- ☐ Manual
- ☒ Motorizado | Motorised
- ☒ Automatizado | Automated

Faldón enrollable Sombrex

- ☒ Manual
- ☒ Motorizado | Motorised

Sujeción | Mounting

- ☒ Frontal | Wall
- ☒ A techo | Ceiling

Posibilidades de Iluminación
Lighting possibilities

- ☐ Perfil cofre | Cassette profile
- ☒ Perfil frontal | Front profile
- ☒ Brazos (Onyx Lux) | Arms (Onyx Lux)

Acabados | Finishes

lacado según normativa QUALICOAT
lacquer in accordance with QUALICOAT standards

Tornillería de acero inoxidable
Stainless steel screws and bolts

Brazos con lacado integral
Arms with integral laquering

Instalaciones habituales | Usual installations

Terrazas
Terraces



Grandes terrazas
Large terraces



Recomendado con brazos | Recommended with arms

LLAZA-ONYX System



LLAZA-SPLENDOR System



Clasificación | Classification

Normativa | Standards: UNE-EN 13561:2015



Viento | Wind
Hasta 28Km/h | Up to 28 km/h



Durabilidad | Durability
Mín.10.000 maniobras | 10.000 maneuvers min.


Compatible con brazos | Compatible with arms




Onyx-400
Onyx Lux-400
Splendor-400

Cotas | Dimensions (mm)


Instalación frontal | Wall mounting

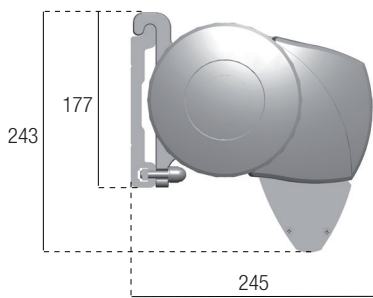


Instalación a techo | Ceiling mounting

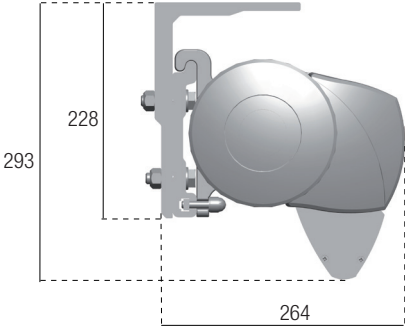


Placa frontal
Wall plate



Placa frontal fij. química
Wall plate fix. chemical




Soporte escuadra techo
Ceiling square bracket

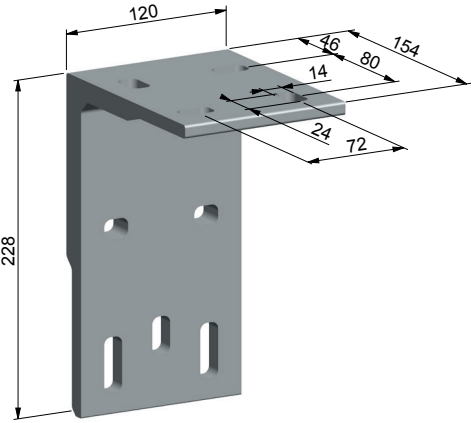

Grados de inclinación | Slope

Frontal o con soporte escuadra a techo | Front or using the ceiling square bracket



Líneas mínimas para brazos
recomendados
Minimum width for
recommended arms (m)

Salida Projection	Línea mínima Minimum width	
	2 Brazos 2 Arms	
1,50	1,90	
1,75	2,14	
2,00	2,39	
2,25	2,64	
2,50	2,89	
2,75	3,14	
3,00	3,39	
3,25	3,64	
3,50	3,89	

Dimensiones máx. para tejidos recomendados
Max. dimensions for recommended fabrics (m)

Toldo Splenbox Splenbox awning			
	Linea x salida Width x projection	2 Brazos 2 Arms	
RECACRIL	RECACRIL	5,00 x 3,50	6,00 x 3,00
	RECSYSTEM	5,00 x 3,50	6,00 x 3,00
	RECWATER	5,00 x 3,00	6,00 x 2,50
RECScreen	RecScreen 4000P - 1%	5,00 x 3,25	6,00 x 2,75
	RecScreen 6000 - 2%	5,00 x 3,00	6,00 x 2,50
	RecScreen 7000 - 3%	5,00 x 3,25	6,00 x 2,75
	RecScreen RAINLESS	5,00 x 3,00	6,00 x 2,50
PVC	RECAFLEX PRO	5,00 x 3,50	6,00 x 2,50

Sombrex Sombrex		
		Altura Height
RECScreen	RecScreen 4000P - 1%	1,80
	RecScreen 6000 - 2%	1,80
	RecScreen 7000 - 3%	1,80
	RecScreen 3500P - 5%	1,80
	RecScreen 5000P - 10%	1,80
RECACRIL	RecScreen RAINLESS	1,80
	RECACRIL	1,40
	RECSYSTEM	1,40

